




DHD160G10B

printed on: 27-11-2024



TECHNICAL INFO

Media type	INORGANIC FIBERGLASS
Efficiency	10 μm _(c) βx ≥ 200
Efficiency 1	12 μm _(c) βx ≥ 1000
Flow direction	OUT-IN
Collapse ∆p	20 bar
Seals	NBR
Temperature range	-30°C +100°C

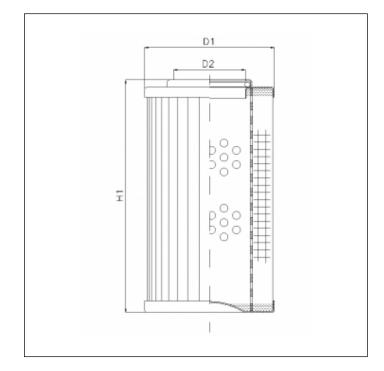

OVERALL DIMENSIONS

D1	69,0 mm
D2	34,2 mm
H1	115,0 mm

Technical information may change without notice. Image and drawing are representative only