



U134G06V0/ESD

printed on: 25-03-2025

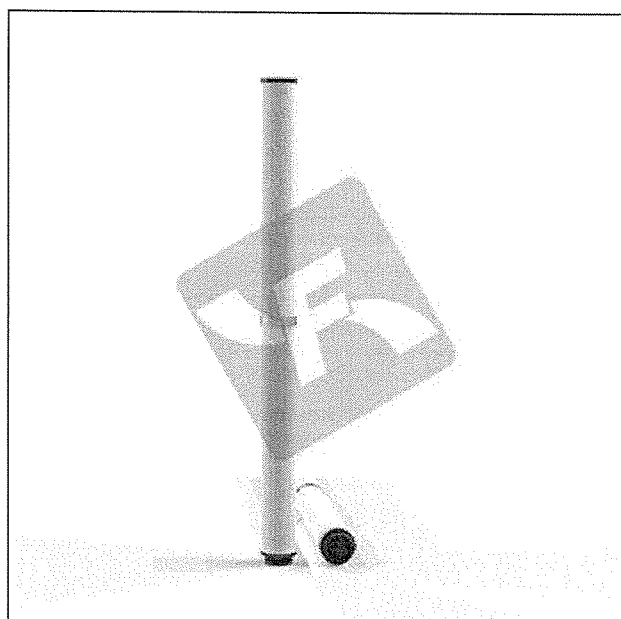

TECHNICAL INFO

| | |
|-------------------|---|
| Media type | INORGANIC FIBERGLASS |
| Efficiency 1 | 7 $\mu\text{m}_{(c)}$ $\beta_x \geq 2000$ |
| Flow direction | IN-OUT |
| Burst Δp | 10 bar |
| Seals | FKM |
| Temperature range | -25°C +120°C |
| Note | ANTI-ESD FILTER ELEMENT |

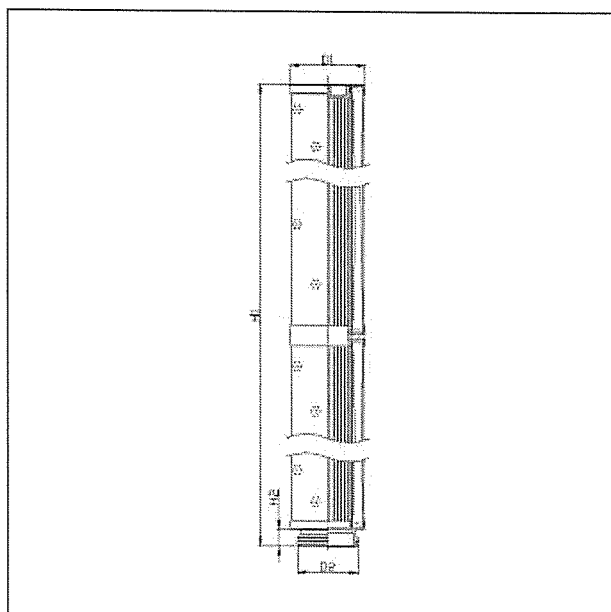

OVERALL DIMENSIONS

| | |
|----|------------|
| D1 | 79,0 mm |
| D2 | 64,0 mm |
| H1 | 1.030,5 mm |
| H2 | 18,5 mm |

Technical information may change without notice. Image and drawing are representative only