


U164G03V/ESD

printed on: 16-05-2025



TECHNICAL INFO

Media type	INORGANIC FIBERGLASS
Efficiency	$<4 \mu\text{m}_{(c)} \beta_x \geq 200$
Efficiency 1	$5 \mu\text{m}_{(c)} \beta_x \geq 1000$
Flow direction	IN-OUT
Burst Δp	10 bar
Seals	FKM
Temperature range	-25°C +120°C
Note	ANTI-ESD FILTER ELEMENT

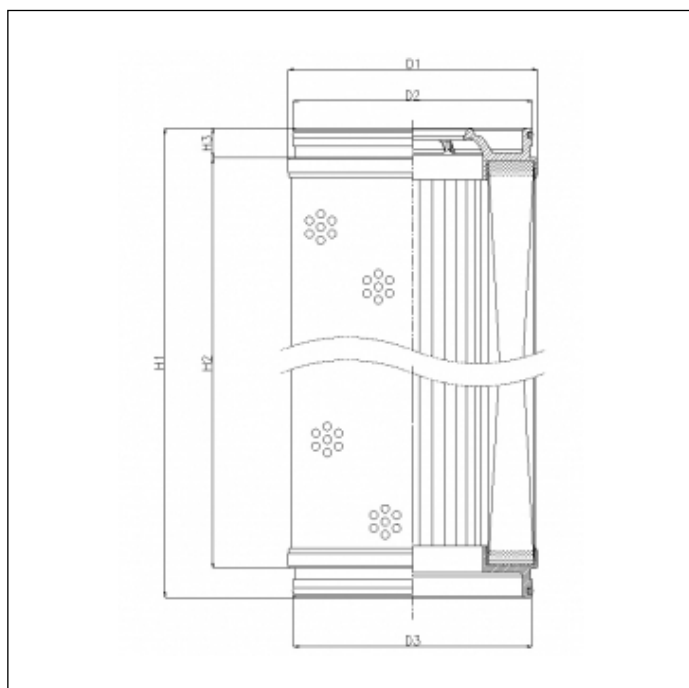

OVERALL DIMENSIONS

D1	152,5 mm
D2	146,0 mm
D3	146,0 mm
H1	1.055,0 mm
H2	1.019,0 mm
H3	18,0 mm