




XD063G10A




printed on: 17-09-2024

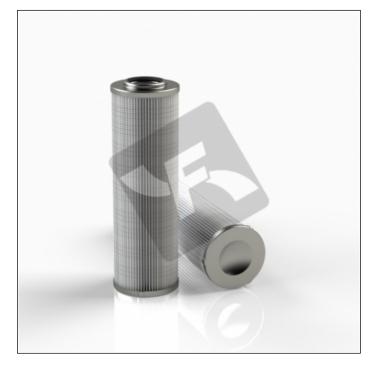

TECHNICAL INFO

Media type	INORGANIC FIBERGLASS
Efficiency	10 μm _(c) βx ≥ 200
Efficiency 1	12 μ m _(c) β x ≥ 1000
Flow direction	OUT-IN
Collapse ∆p	21 bar
Seals	NBR
Temperature range	-30°C +100°C

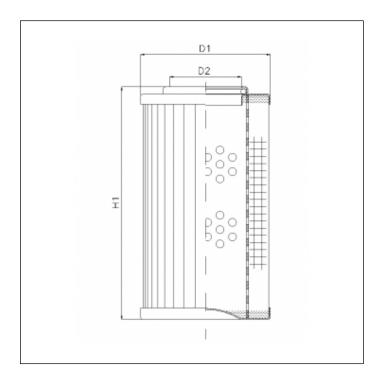

OVERALL DIMENSIONS

D1	44,5 mm
D2	22,3 mm
H1	157,0 mm

Technical information may change without notice. Image and drawing are representative only